

---

# Belle calorimeter upgrade.

BNM, Jan. 25, 2008

A.Kuzmin


## Outline:

- Upgrade scheme
- Barrel upgrade
- Trigger upgrade
- Endcap upgrade to pure CsI
- Summary


## Problems with the present calorimeter

Now  $L \approx 10^{34} s^{-1} cm^{-2}$ ,  $I \approx 1.5 A \Rightarrow$  Upgraded  $L > 10^{35} s^{-1} cm^{-2}$ ,  $I \approx 10 A$ .

### Radiation damages of the crystals

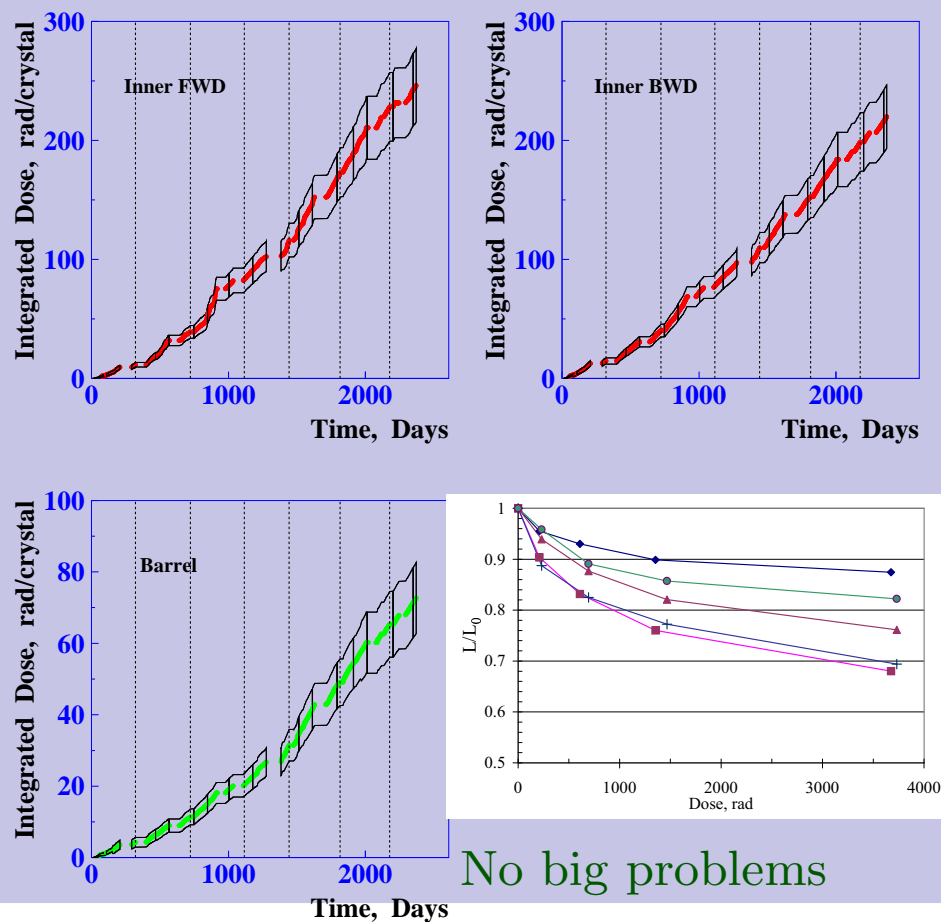


### Radiation damages of PIN photodiodes

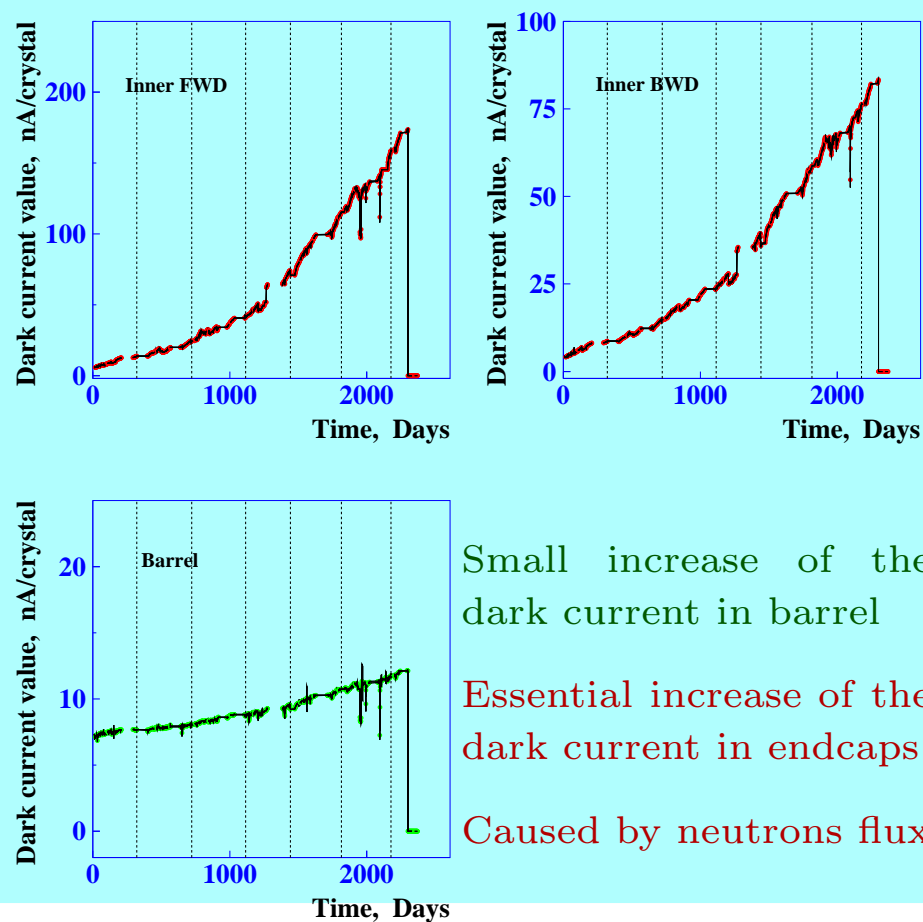

# Calorimeter performance degradation

## Fake clusters

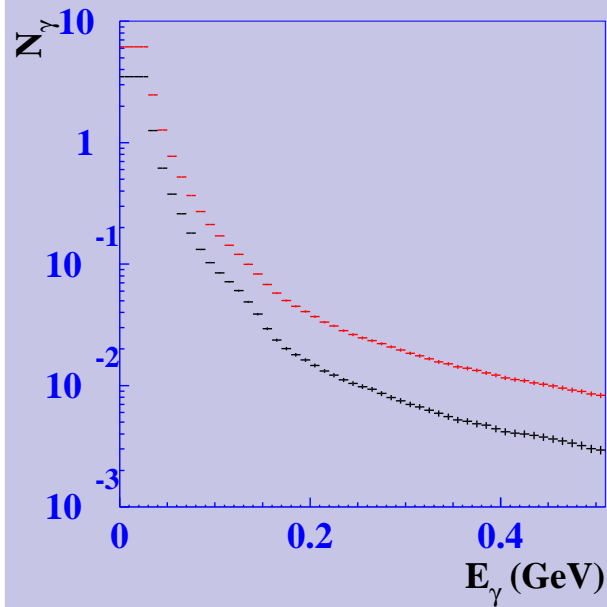


( $E > 20$  MeV) 6 fake clusters,  
3 in barrel 3 in endcaps


$\sim$  background

## Pileup noise


$$\sigma = \overline{E_\gamma} \sqrt{\nu \tau_{eff}} \sim \sqrt{IP}$$

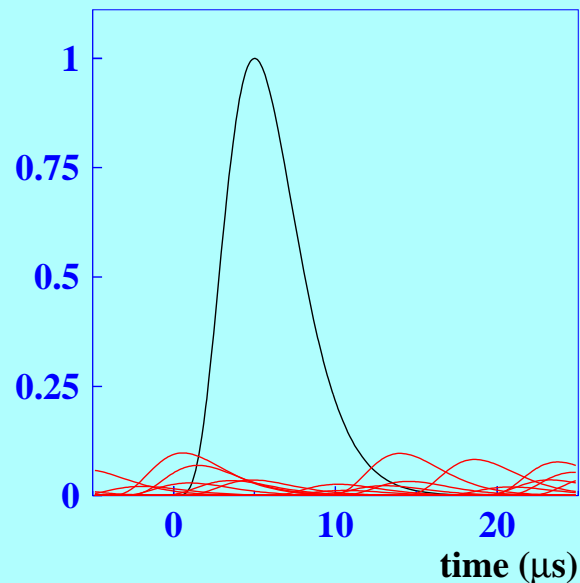

$\sim \sqrt{\text{background}}$

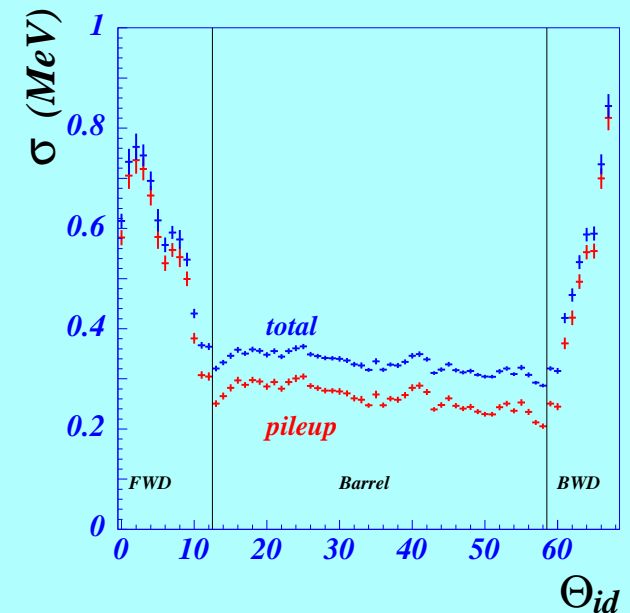

One of the way to solve problems of the fake clusters and pileup noise is to reduce decay time of the scintillator and electronics shaping time.

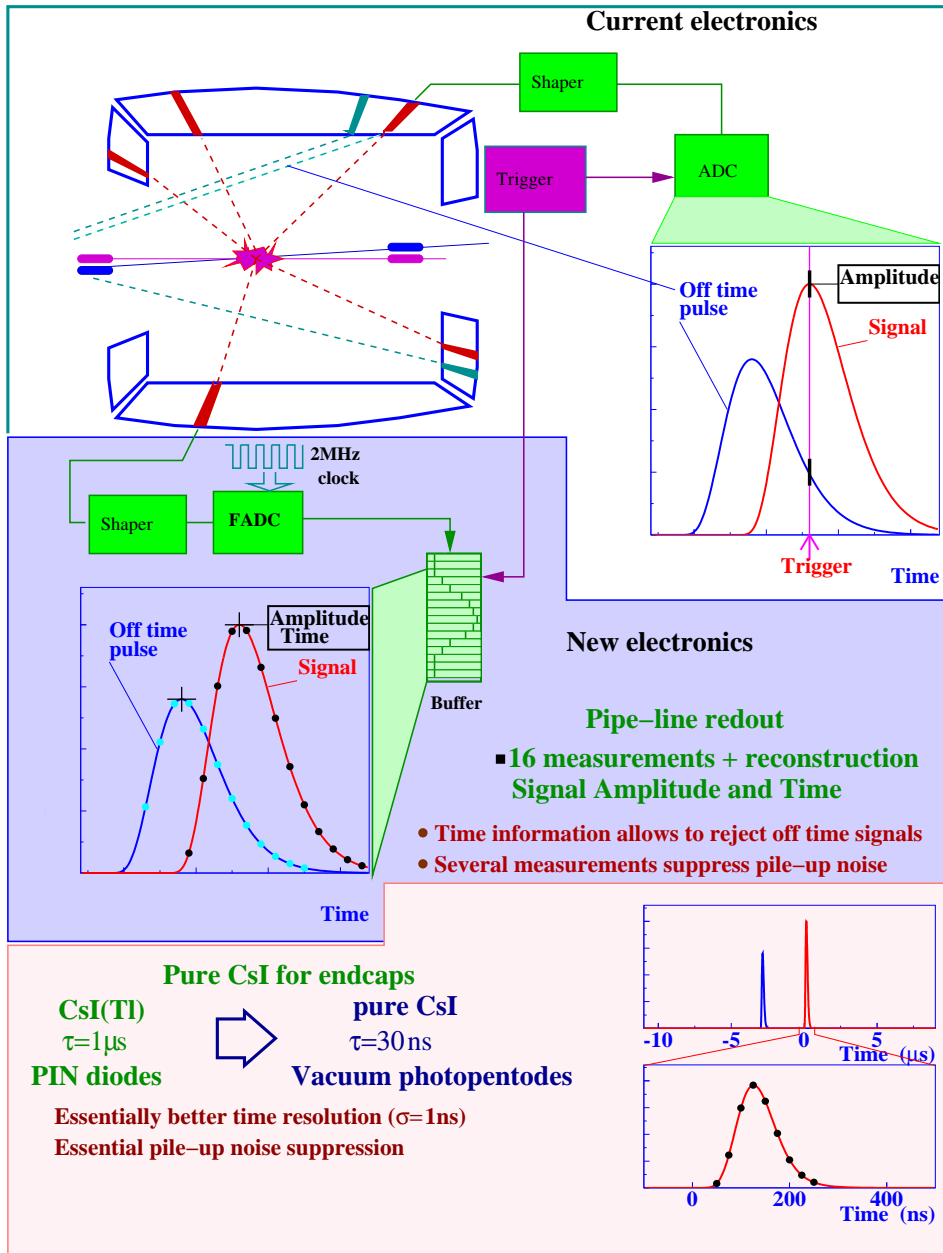

- Modify electronics for the barrel.
- Pipe-line readout with waveform analysis:
- Replace the CsI(Tl) by the pure CsI crystals in endcaps.
- 16 points within the signal are fitted by the signal function  $F(t)$ :


$$F(t) = A f(t - t_0)$$

$A$  - amplitude of the signal and  
 $t_0$  - time of the signal,

$$\chi^2 = \sum (y_i - A f(t_i - t_0)) S_{ij}^{-1} (y_i - A f(t_i - t_0))$$




- Both amplitude and time information is reconstructed:

## Expected improvement

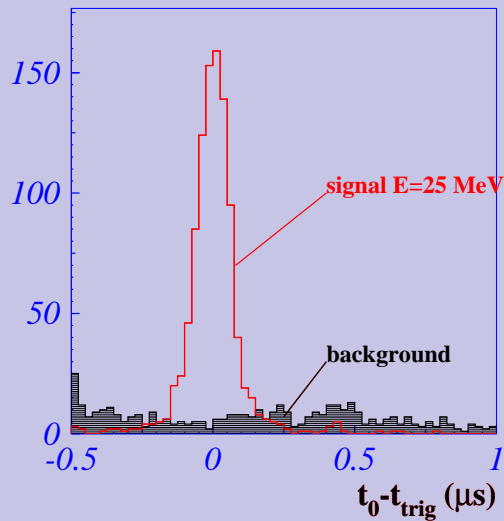


- Time information allows to suppress the fake clusters 7 times for the barrel by rejecting wrong time clusters.
- For endcaps the suppression factor is  $7 \times 30 \approx 200$  due to shorter decay time of the pure CsI

- The pileup noise will be reduced factor  $\sim 1.5$  for barrel and factor 5 for endcaps:

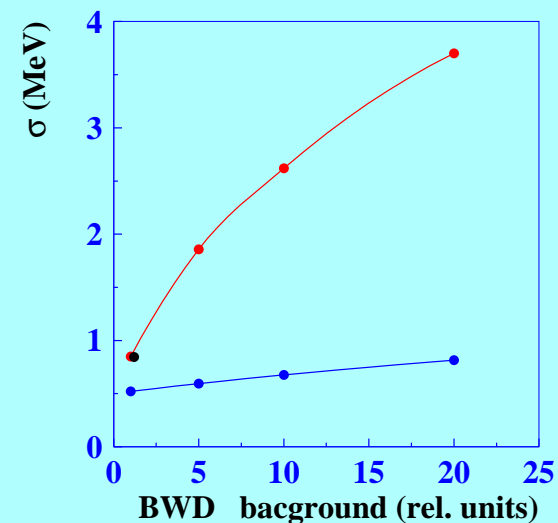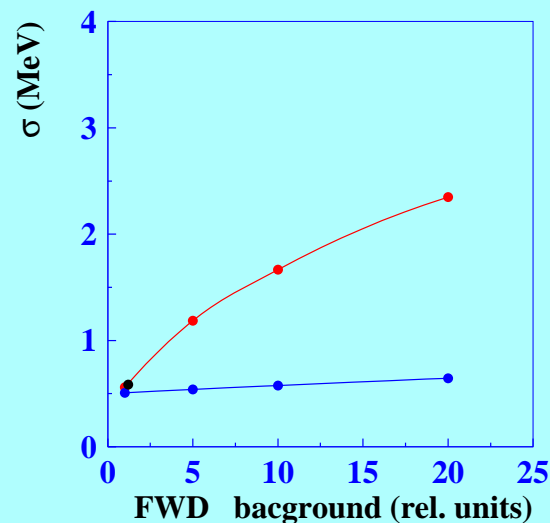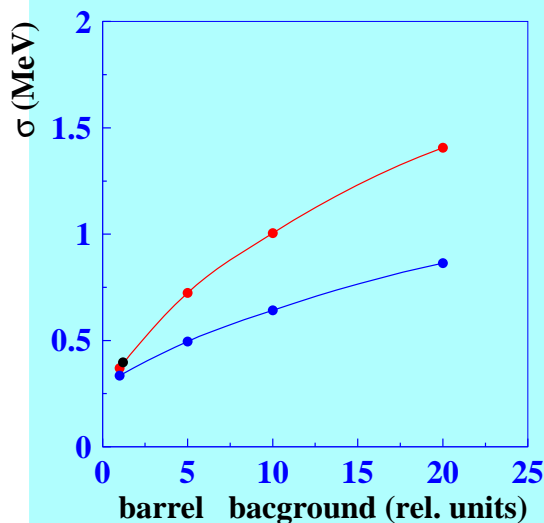


# Electronics modification(barrel)

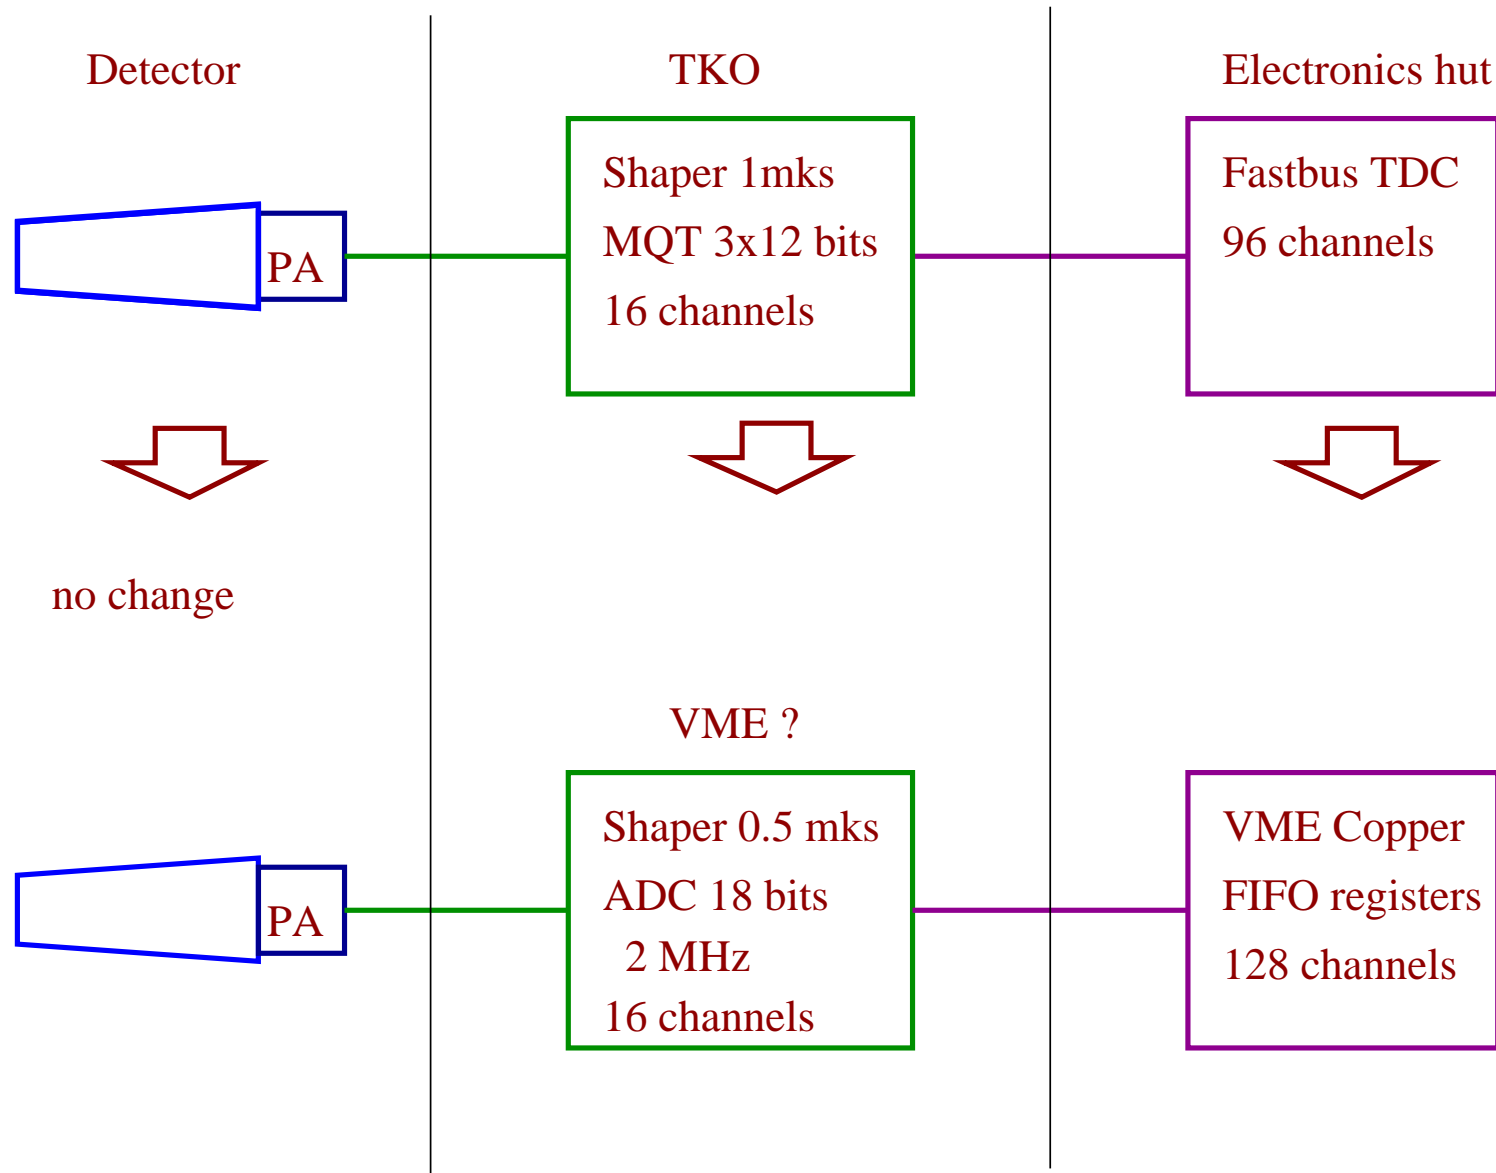


## Shaper status

- Two TKO modules (containing 18-bits ADC) were produced in HOSHIN on April 2007.
- They have been tested in May-September. It has shown expected parameters.
- Eight TKO modules with small corrections have been produced beginning of October and are being tested now.

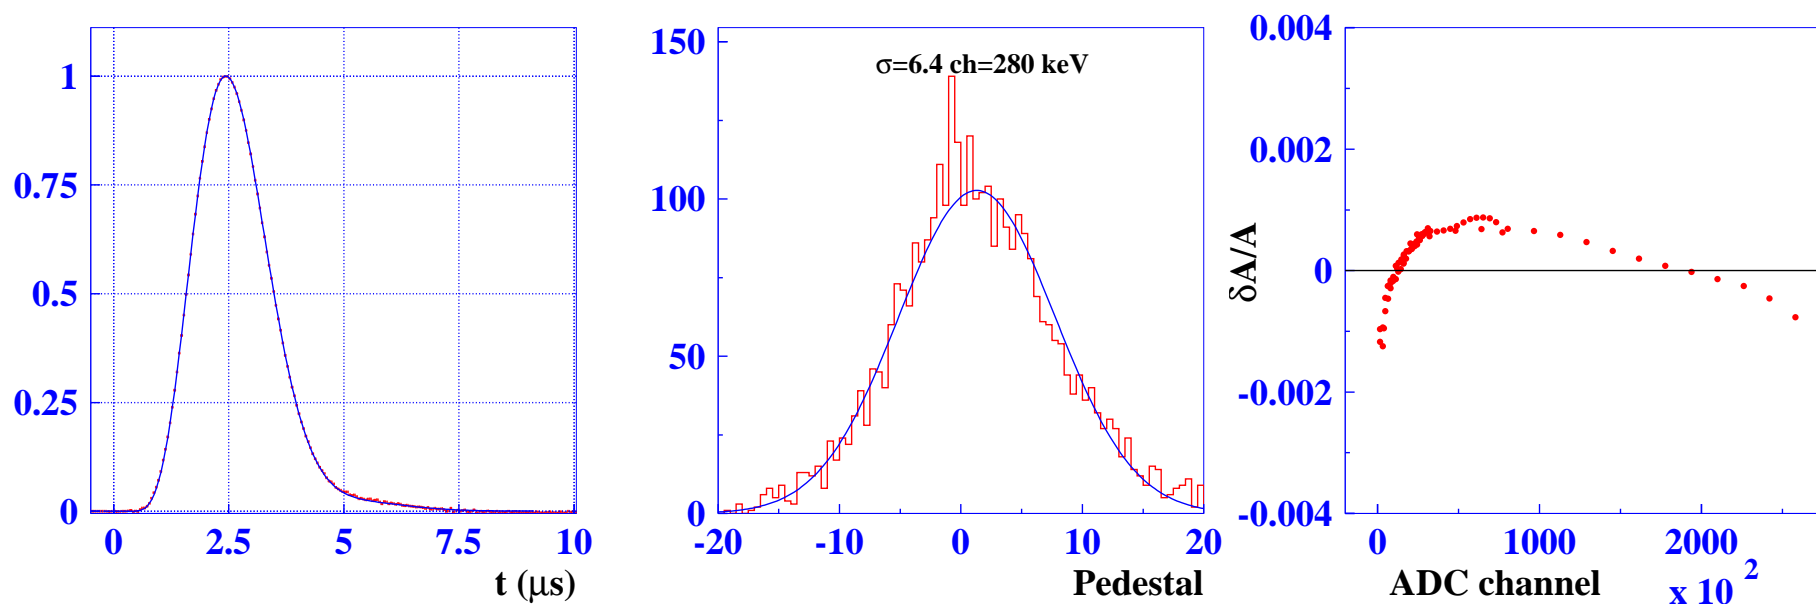

## FINESSE status

- HOSHIN produced 16-channel FINNESE in March 2006.
- Tandem 64-channel FINNESE was developed and two modules has been produced in HOSHIN.
- The simple algorithm of energy reconstruction was implemented.

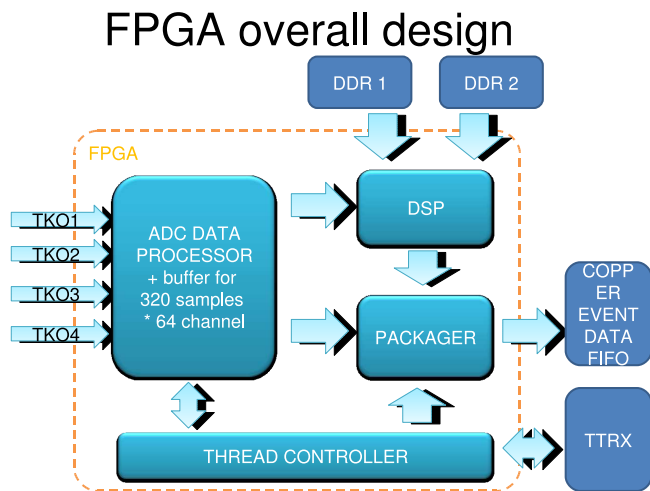

### Algorithm details


$$\chi^2(A, p, t_0) = \sum_{i,j} (y_i - Af(t_i - t_0) - p) S_{ij}^{-1} (y_j - Af(t_j - t_0) - p) \rightarrow \min$$

$$S_{ij} = \sqrt{(y_i - \bar{y})(y_j - \bar{y})}$$

$f(t)$  – counter response

$$Af(t_i - t_i - \Delta t) = Af(t_i - t_i) - A\Delta t f'(t_i - t_i) = Af(t_i - t_i) + Bf'(t_i - t_i)$$


where  $t_i$  – initial time (trigger time)
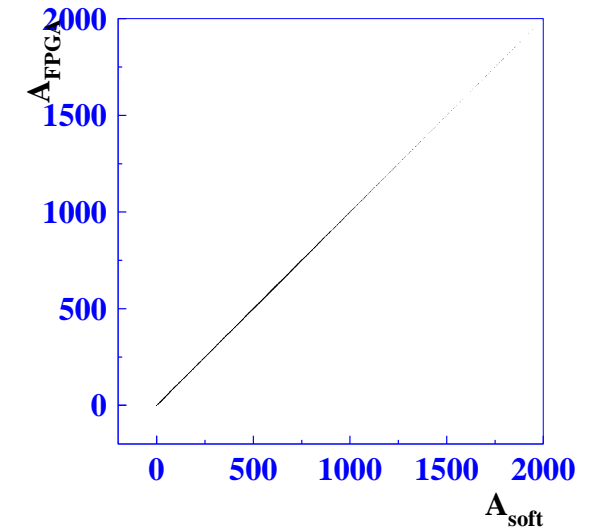
$$\begin{cases} \sum_{i,j} f_i S_{ij}^{-1} (y_j - Af_j - Bf'_j - p) = 0 & A = \sum_i \alpha_i y_i \\ \sum_{i,j} f'_i S_{ij}^{-1} (y_j - Af_j - Bf'_j - p) = 0 & B = \sum_i \beta_i y_i \Rightarrow \Delta t = -B/A \\ \sum_{i,j} S_{ij}^{-1} (y_j - Af_j - Bf'_j - p) = 0 & p = \sum_i \gamma_i y_i \end{cases}$$




# New implementation into current ECL trigger system

*BELLE CsI Electronics*

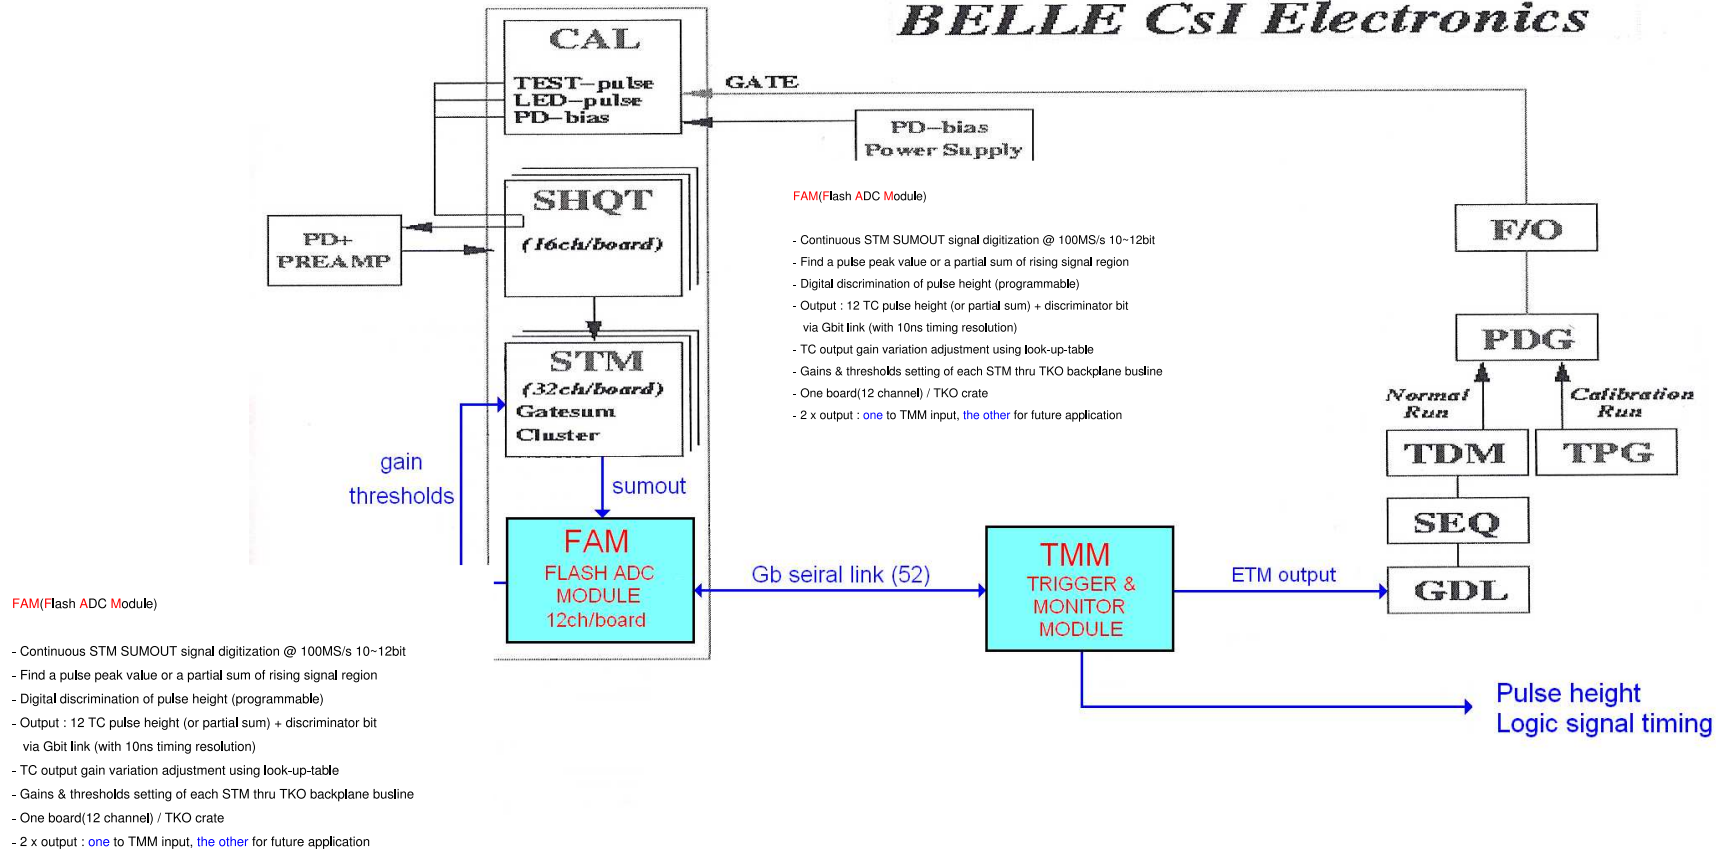


- Usage of 128 channels/COPPER allows to use the same number of VME crates as the number of FUSTBUS crates we use now.

### General statistics




	current system	new system	price okuyen
Number of TKO crates	36	52(VME)	
Number of TKO shapers	432+80	432+80(VME)	2.2
Number of trigger modules	216 STM	52 FAM(VME)	
Number of crates in E.Hut	6	6	
Number of digitizing boards	108(97+11)	83(72+11)	0.6

# Electronics modification(endcap)

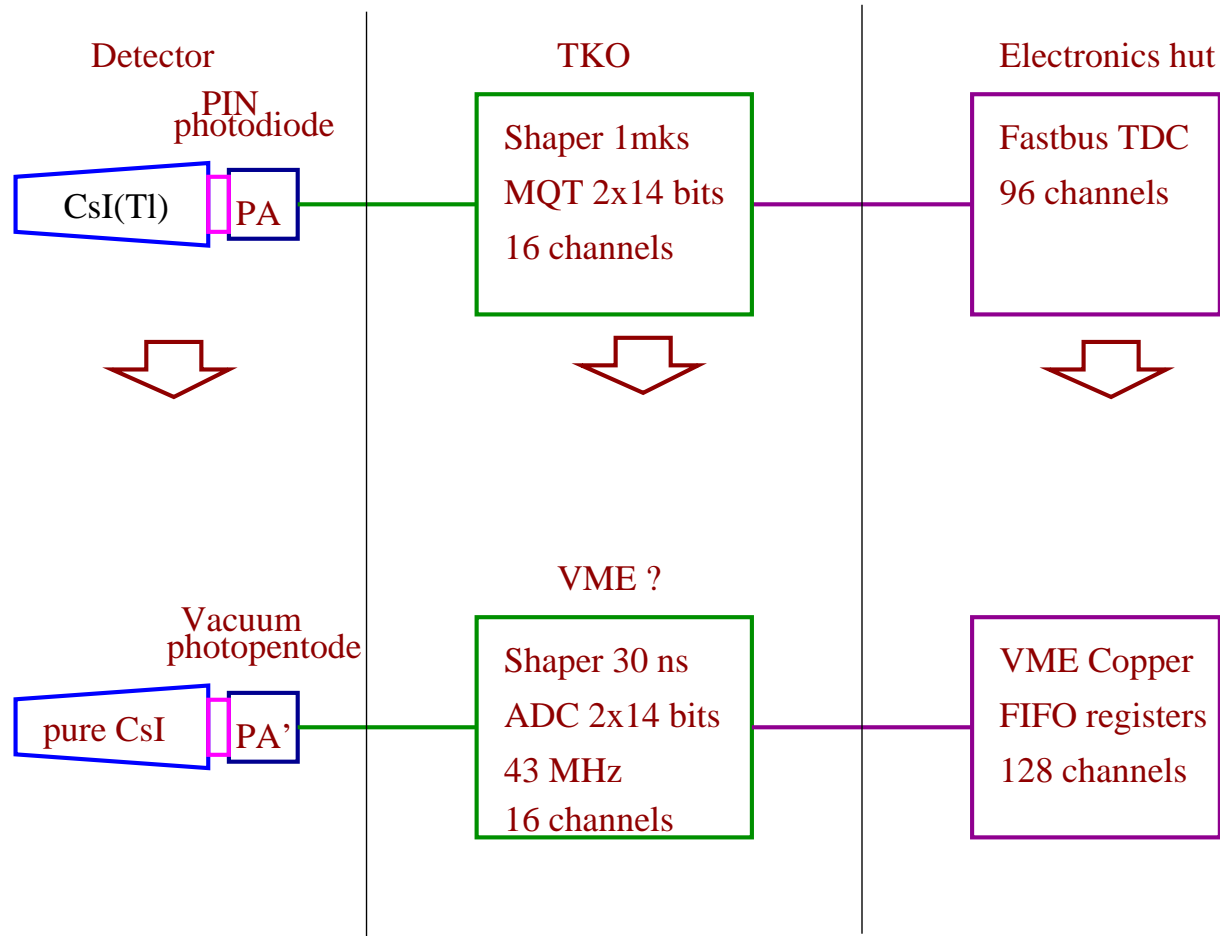

## Radiatio hardness test with photons.

- Radiation hardness of 4 pure CsI crystals(Kharkov) and one counter (pure CsI crystal+ photopentode) were tested with  $\gamma$ -quantum irradiation.
- For 15 krad dose the degradation of the lightoutput for 3 crystals and counter was less than 10%, but one counter lightoutput reduction was about 60%.

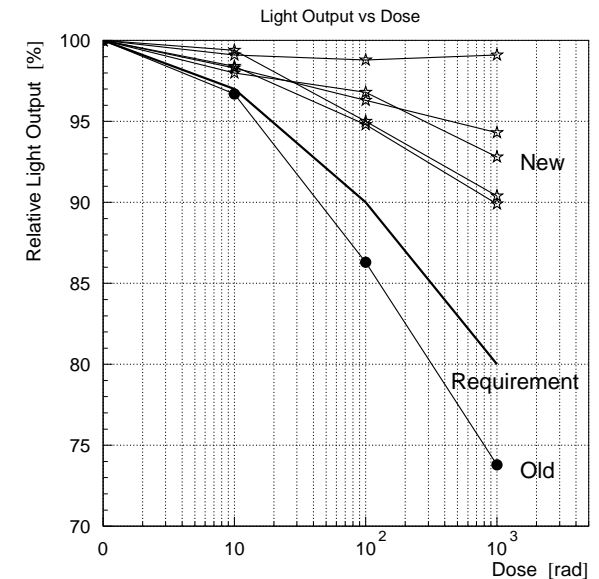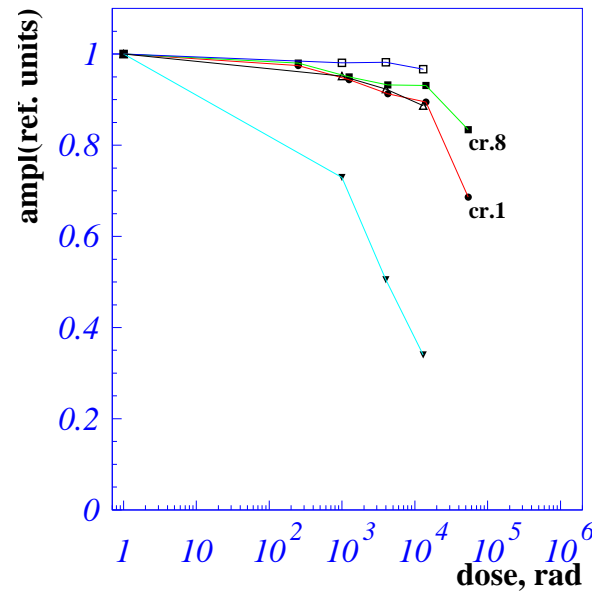
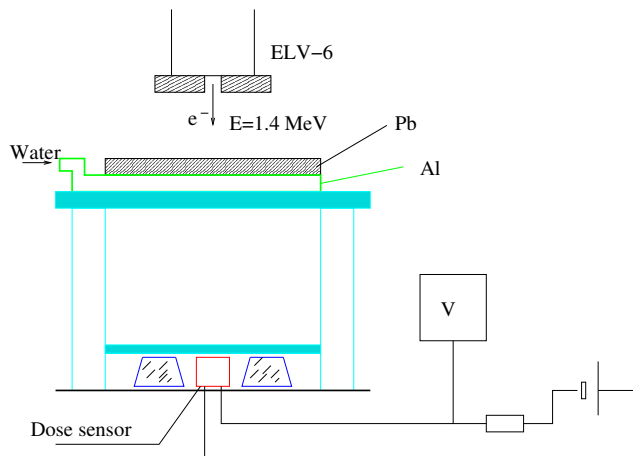


Bremsstrahlung  $\gamma$  ( $E_\gamma = 0 - 1400$  keV)

Dose 0.250, 1, 4, 10, 30 krad

## Radiatio hardness test with neutrons.

- Radiation hardness of CsI(Tl) and 3 pure CsI crystals(Kharkov, Shanghai, Sanit Gobain) were tested with neutron  $n = 10^{12}cm^{-2}$ .

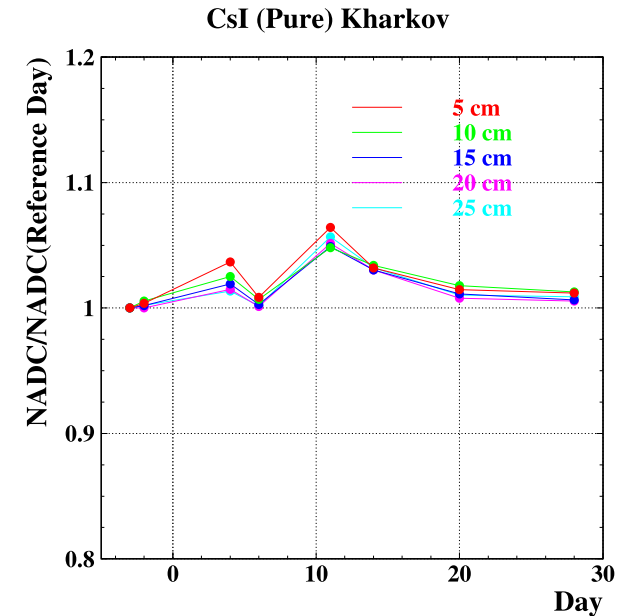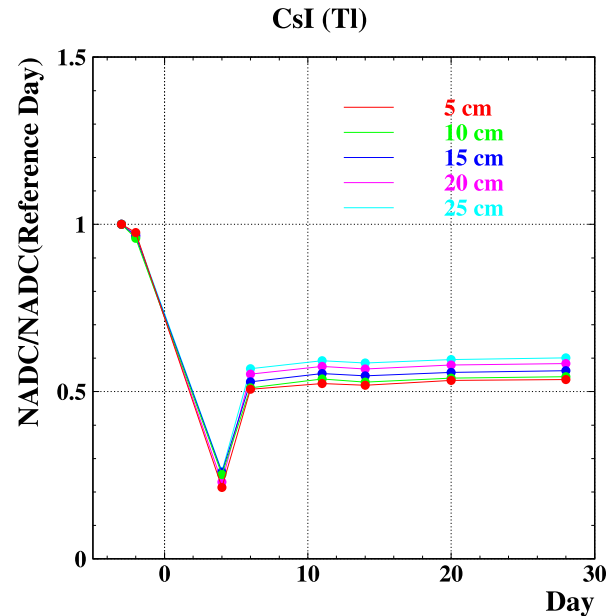

- Lightoutput of CsI(Tl) was decreased about two times.
- All 3 pure CsI crystals showed change of lightoutput less than 5%.






# Photodetector

Hamamatsu developed the 2' UV sensitive photopentods(PP)

$C \approx 10 \text{ pF}$ .





PP gain factor 120-240.

(we need  $> 30$  in mag.field)

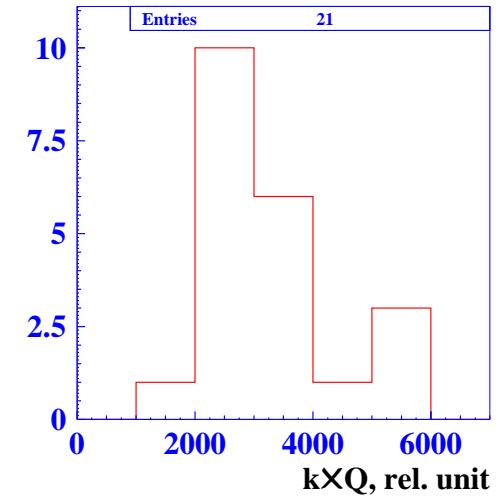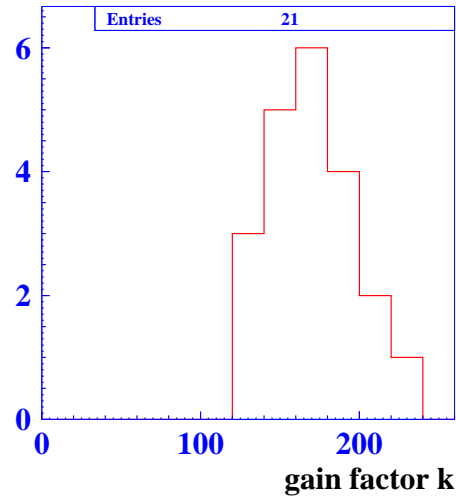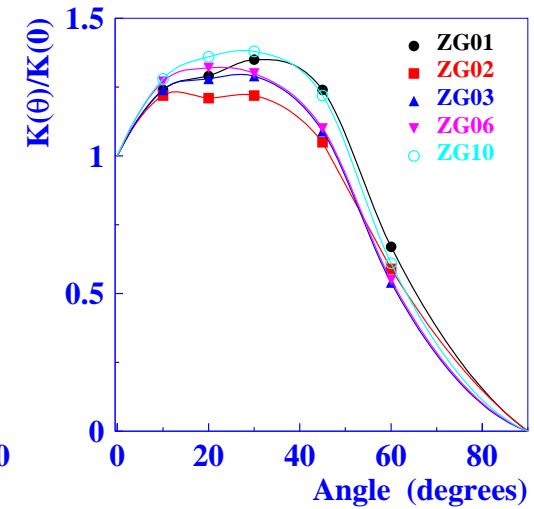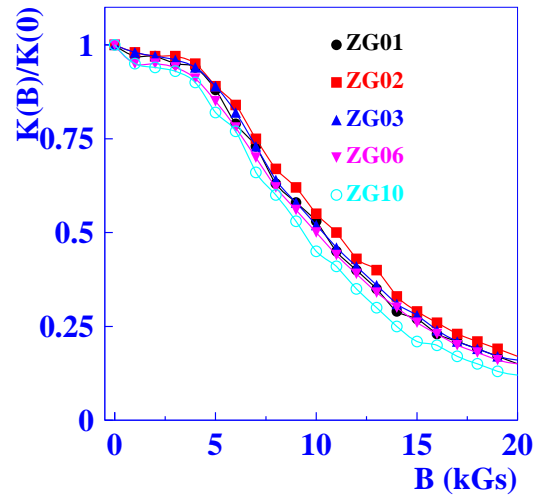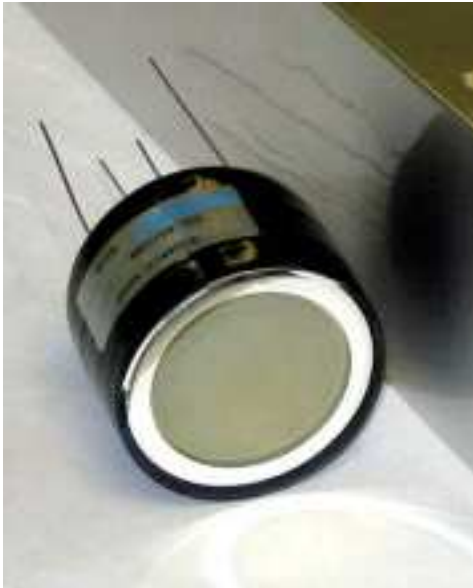

- The gain factor drops down  $\sim 3.5$  times for  $B=15$  kGs
- About 20-30 % improvement for angle 20-45°


# Counters design

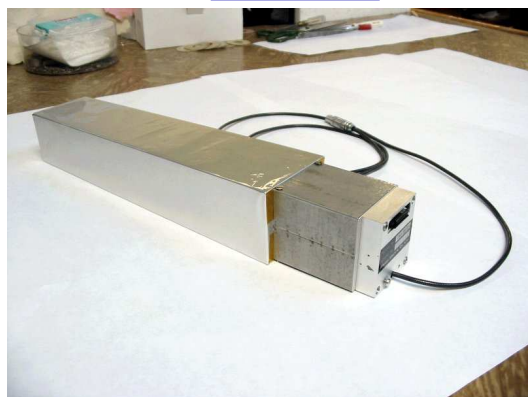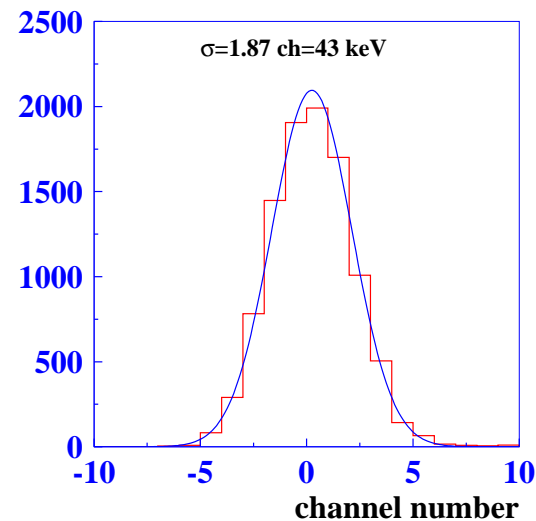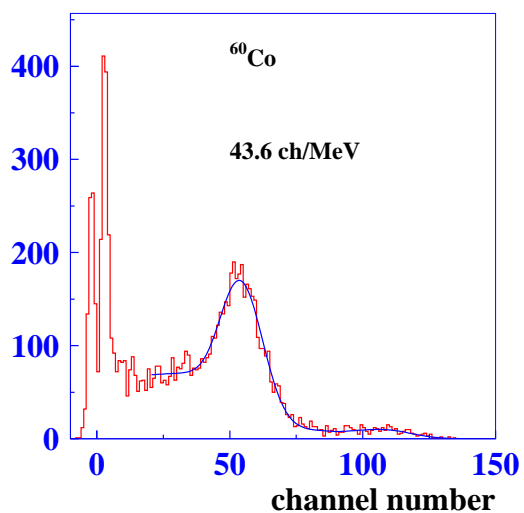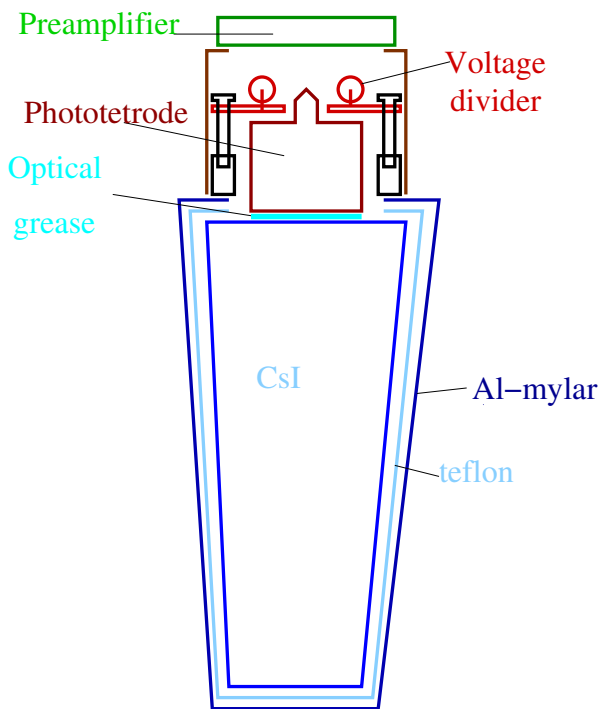


$^{60}\text{Co}$   
 $E = 1.33/1.17 \text{ MeV}$




- Pile-up noise imitated by  $^{60}\text{Co}(E_\gamma = 1.17/1.33 \text{ MeV})$

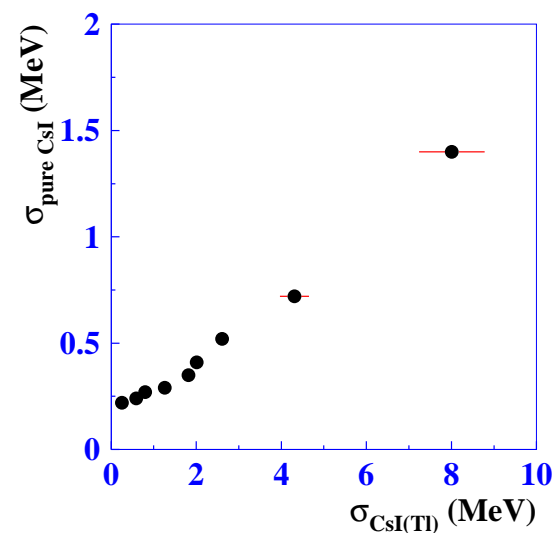


## Energy and time resolution results.

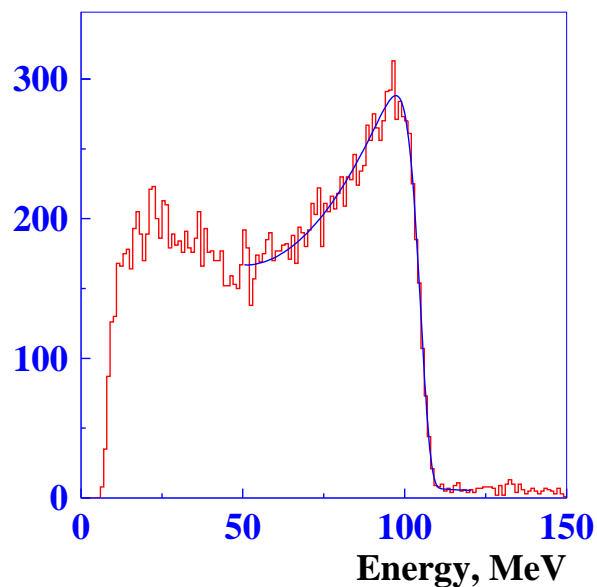

Trigger with TS

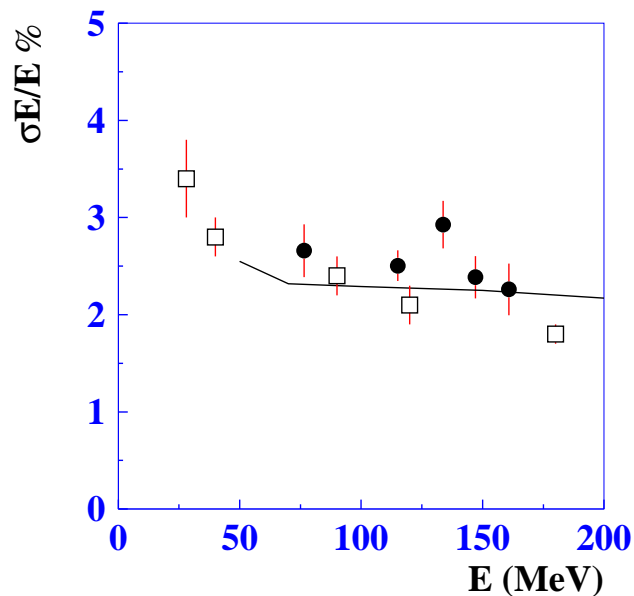

Trigger with CsI

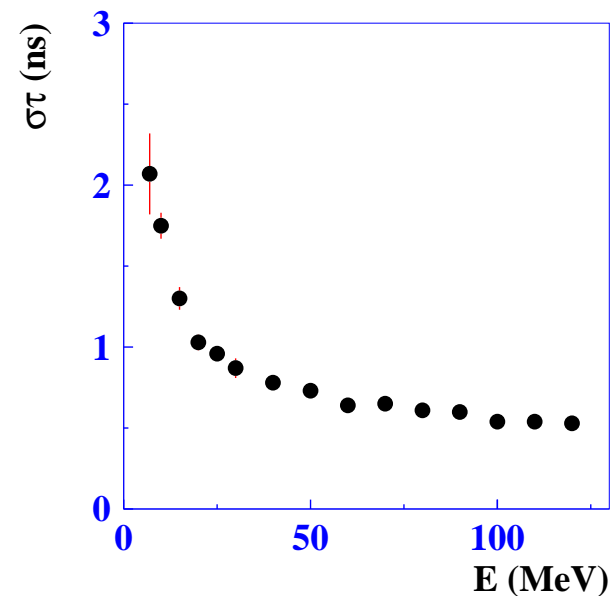


The distributions are fitted by convolution of the Compton spectrum and logarithmic-Gaussian.

$$f(E) = N \left\{ \left( E - \frac{E_C}{2} \right)^2 + \frac{E_C^2}{4} \right\};$$

$$\phi(E) = N \exp \left( - \frac{1}{2\sigma_0^2} \ln^2 \left( 1 - \frac{E - E_p}{\sigma_E} \eta \right) - \frac{\sigma_0^2}{2} \right)$$




- round points pure CsI
- solid line MC
- rectangles CsI(Tl) beam test



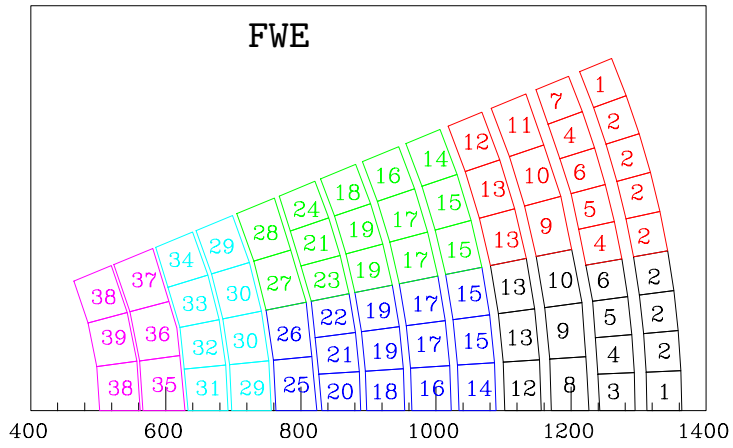

Backward

Forward

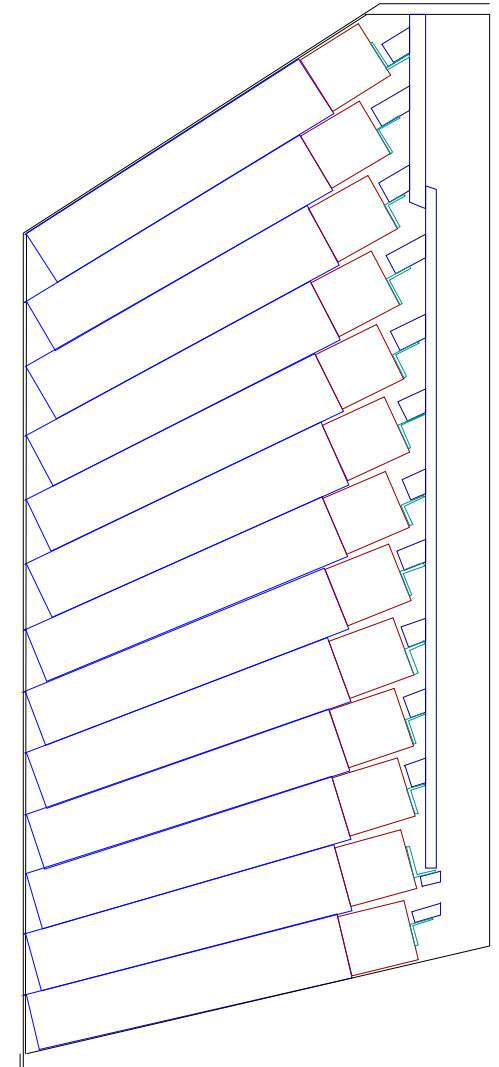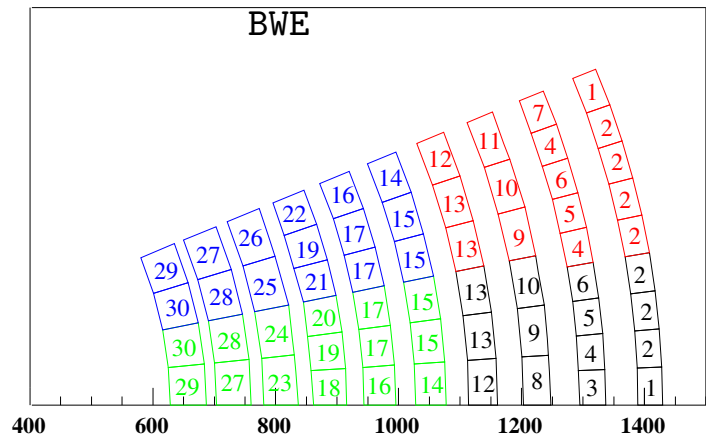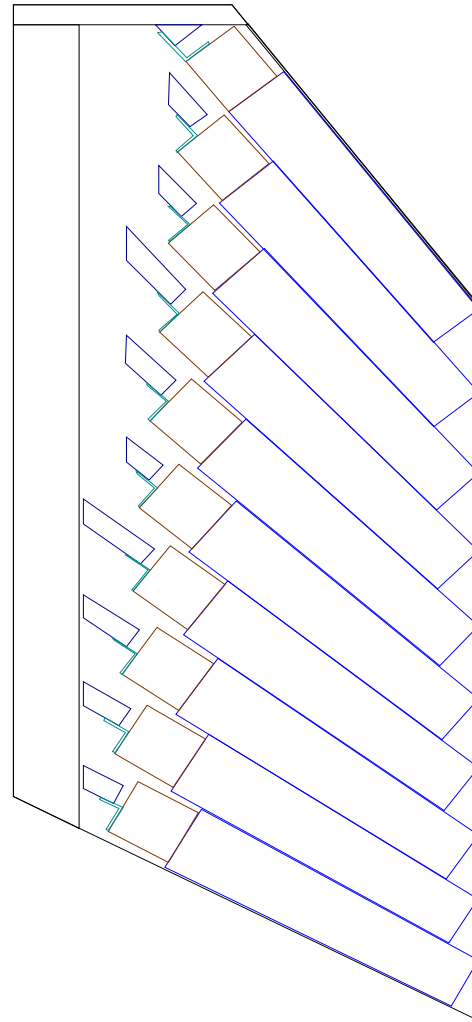

## General statistics

options	3/5FWD	1/2BWD	1/2 Full	FWE	BBWE	Full
Number of crystals	672	480	1 152	1 152	960	2 112
Number geom.types	26	17	43	39	30	69
Weight of CsI, 10 <sup>3</sup> kg	3.5	2.4	5.9	5.8	4.7	10.5
Price, k\$	2 600	1 900	4 500	4 500	3 700	8 200
Number of PP	672	480	1 152	1 152	960	2 112
Price, k\$	400	300	700	700	600	1 300
Preamplifier+box	672	480	1 152	1 152	960	2 112
Price, k\$	70	50	120	110	100	210
Number of Shaper boards	48+32	32+32	80+64	80	64	144
Number of COPPER boards	6+4	4+4	10+8	10	8	18
Number of HV	16	16	32	16	16	32
Price, k\$	490	410	900	490	410	900
Mechanical modification						
Price, k\$	200	200	400	200	200	400
Total price, k\$	3 750	2 850	6 600	6 000	5 000	11 000

- 
- We can keep the present containers, but for the longer counters we need modify the existing supporting structure.
  - If there is no money for whole endcap modification we can replace a part of the endcap.
  - To use the same crate both for slow and fast shapers

## Preliminary Time table

		2008		2009				2010				2011				2012	
		III	IV	I	II	III	IV	I	II	III	IV	I	II	III	IV	I	II
Crystal	preperation production	x	x	x	x		x	x	x	x	x	x	x	x			
PP	preperation production test	x	x														
		x	x	x	x	x	x	x	x		x						
PA	design production	x	x	x	x												
		x	x	x	x												
Counter box	design production	x	x	x	x												
		x	x	x	x												
Counter	production test							x	x	x	x	x	x	x			
								x	x	x	x	x	x	x	x		
Mechanical structure	design production				x	x											
							x	x									
Assembling	mechanical test																
	installation into Belle															x	x
																x	x
Shaper-digitizer(slow)	design production test	x	x	x	x	x	x										
								x					x				
								x		x				x	x		
Shaper-digitizer(fast)	design production	x	x	x	x	x	x										
	test						x				x				x		
							x	x			x	x			x	x	
System test																x	x

---


## Summary

- To keep good performance of the calorimeter for high background conditions we definitely need to upgrade the electronics for the barrel and to replace both crystals and electronics in the endcaps .
- The work for barrel electronics upgrade are going on. The working version of the electronics has been developed. We need to perform test of the electronics integrated to DAQ of the Belle detector.
- The endcap calorimeter based pure CsI counters with modified electronics provides essential pile-up noise suppression.
- We need decision and budget to start with crystal production.

---


# Backup slides

## Shaper ADC

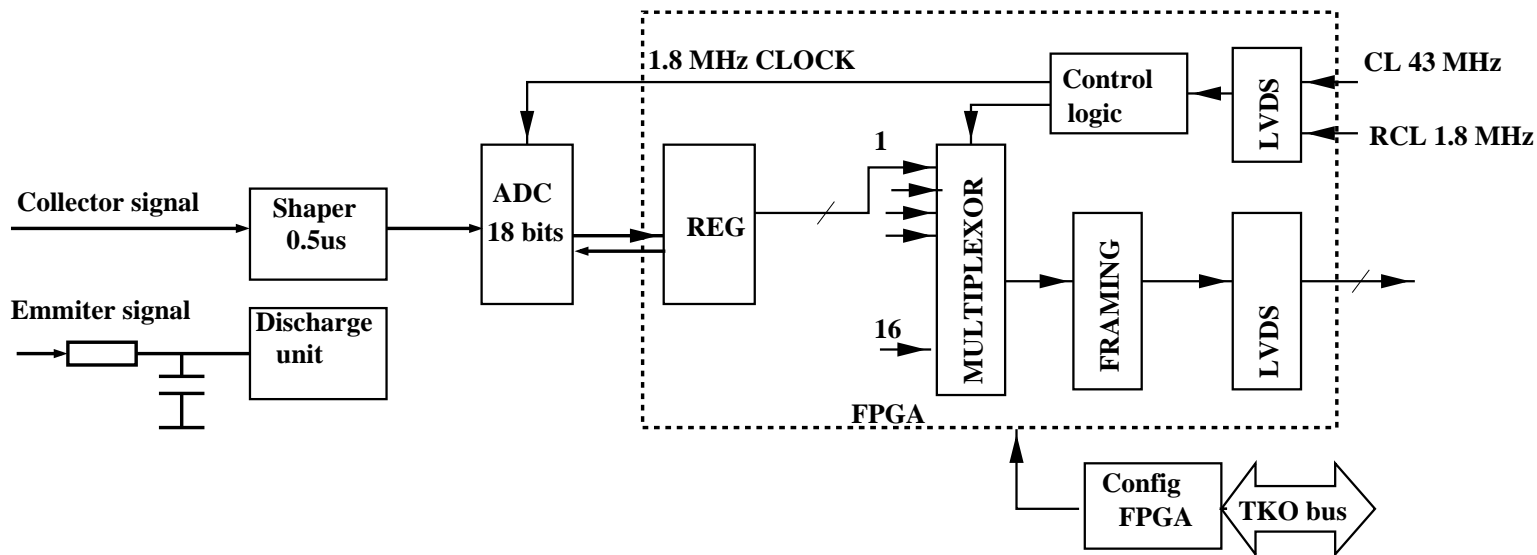

- Each channel has an amplifier and 18 bits ADC.
- The digitization of the signals from the shaper outputs will be performed under the control of the common clock(  $43/24 \approx 1.8\text{MHz}$ ).
- 16 channel amplitudes + 2 control sums will be multiplexered to one line and transmitted to COPPER module with 43 MHz.
- To transmit data to the Electronics Hut we can use the same (TDC)cables.



## FINESSE block diagram

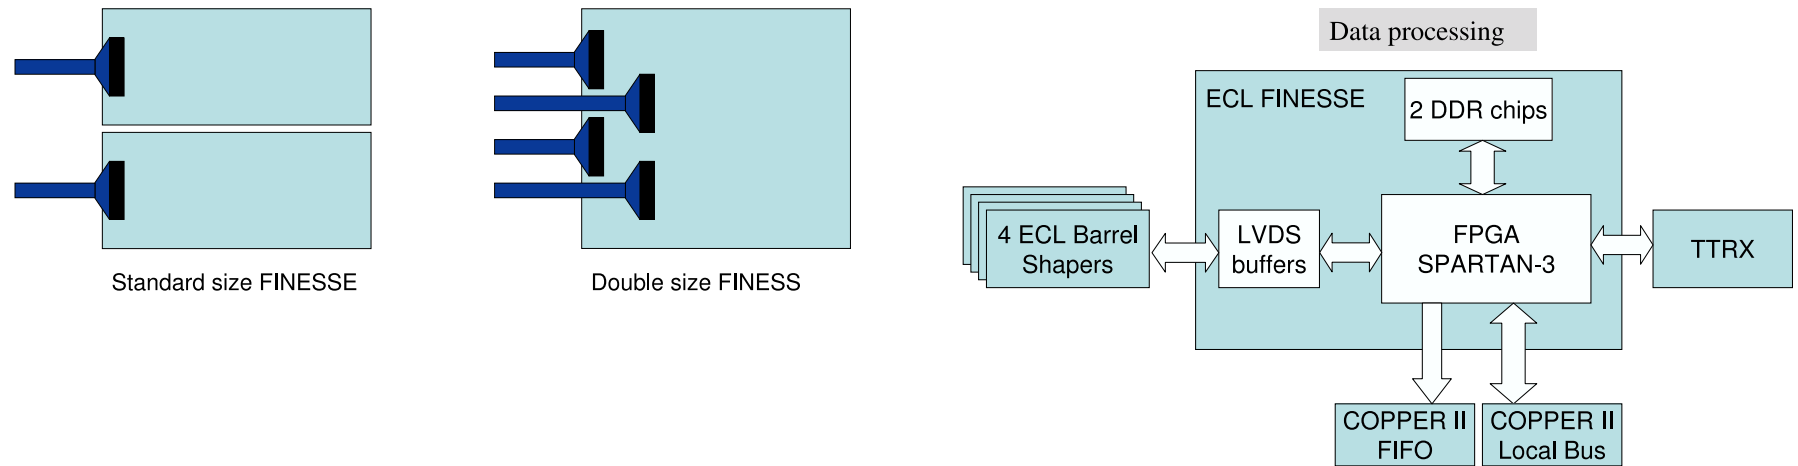


- The tandem-FINESSE board receives data from four shaper modules (64 channels), or 128 channels per one COPPER module.
- The digital processing of the data is supposed to obtain amplitude and time information which allows to suppress fake photons rates factor 7.
- After coming of the trigger signal amplitude and time are re-recorded to the FIFO of COPPER.



# Counter design for endcap.

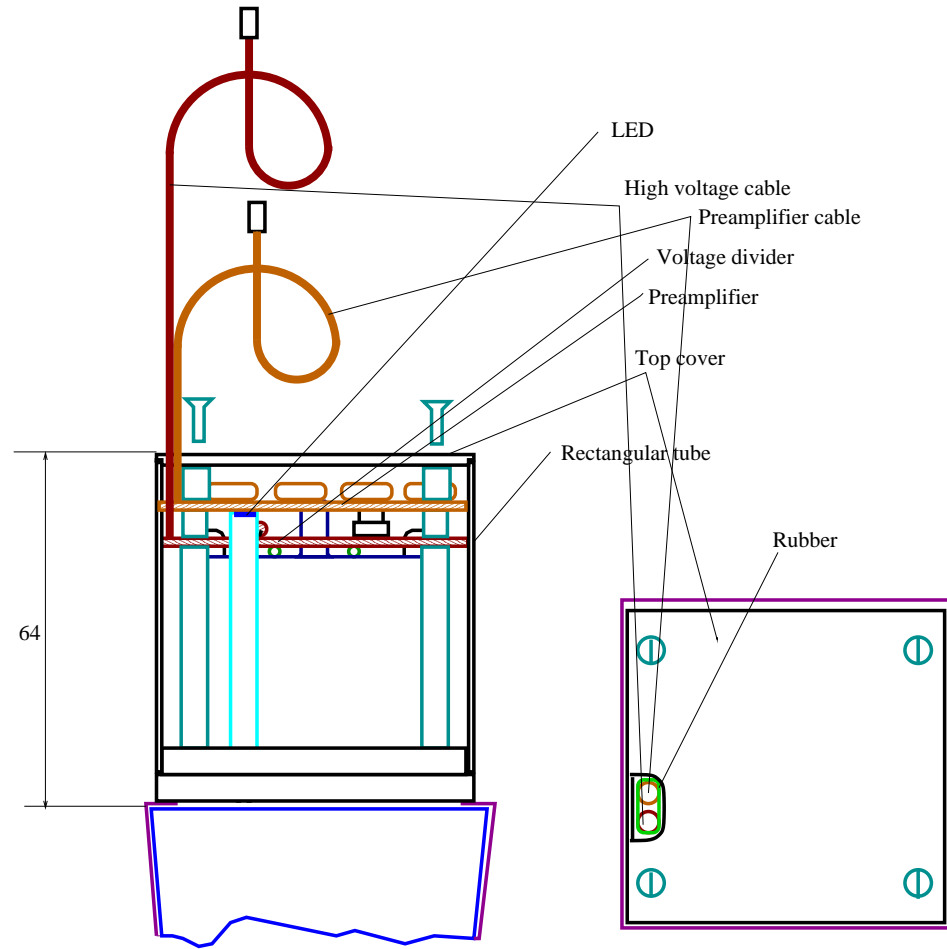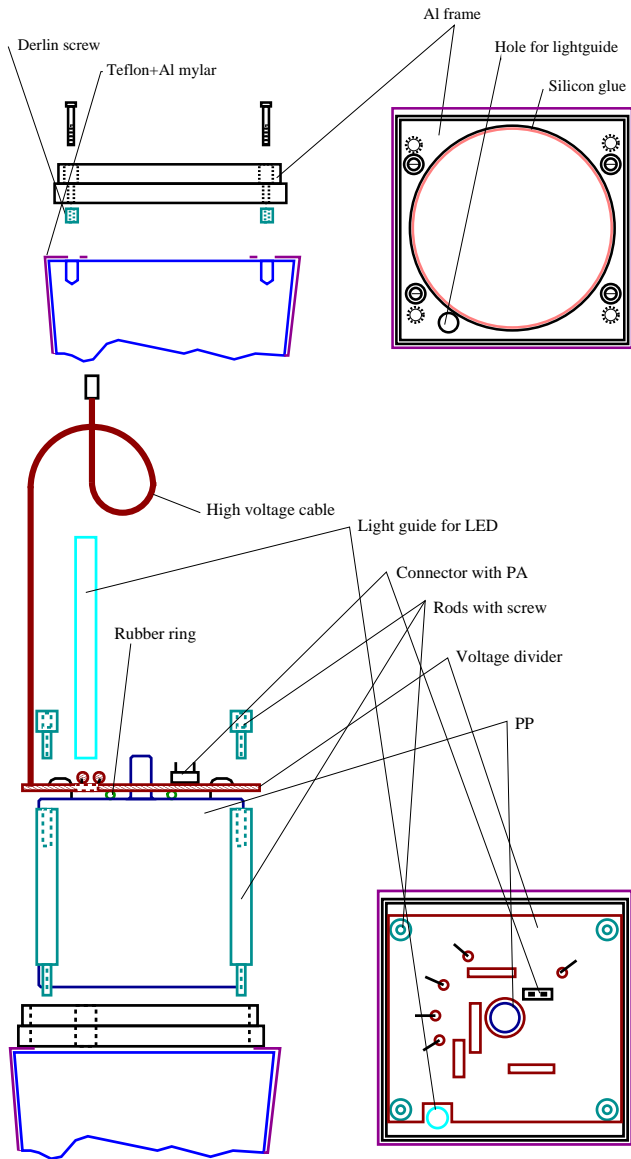


Backward

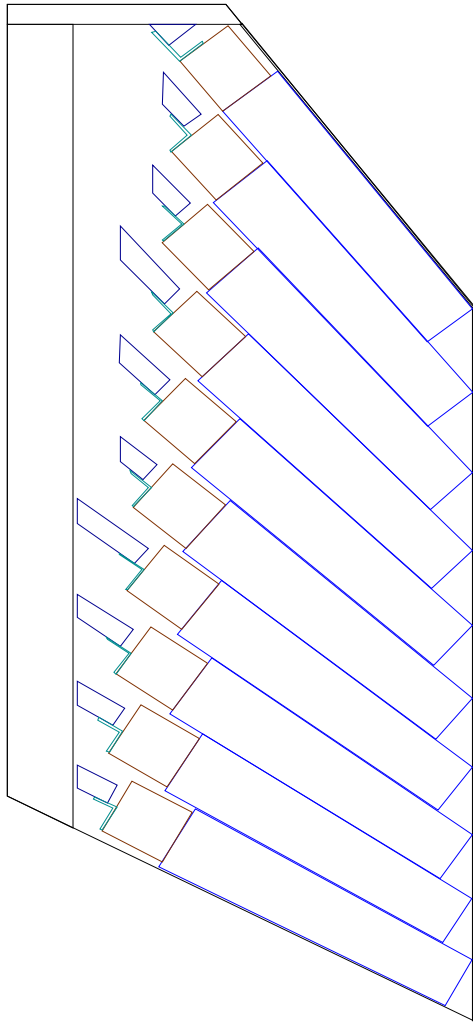


**Mechanical structure**

Forward

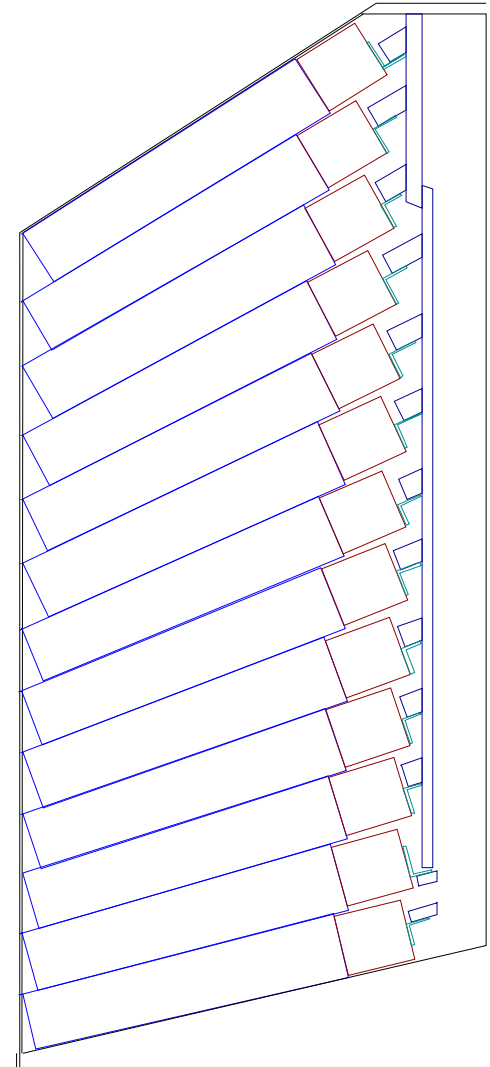

# Beam test

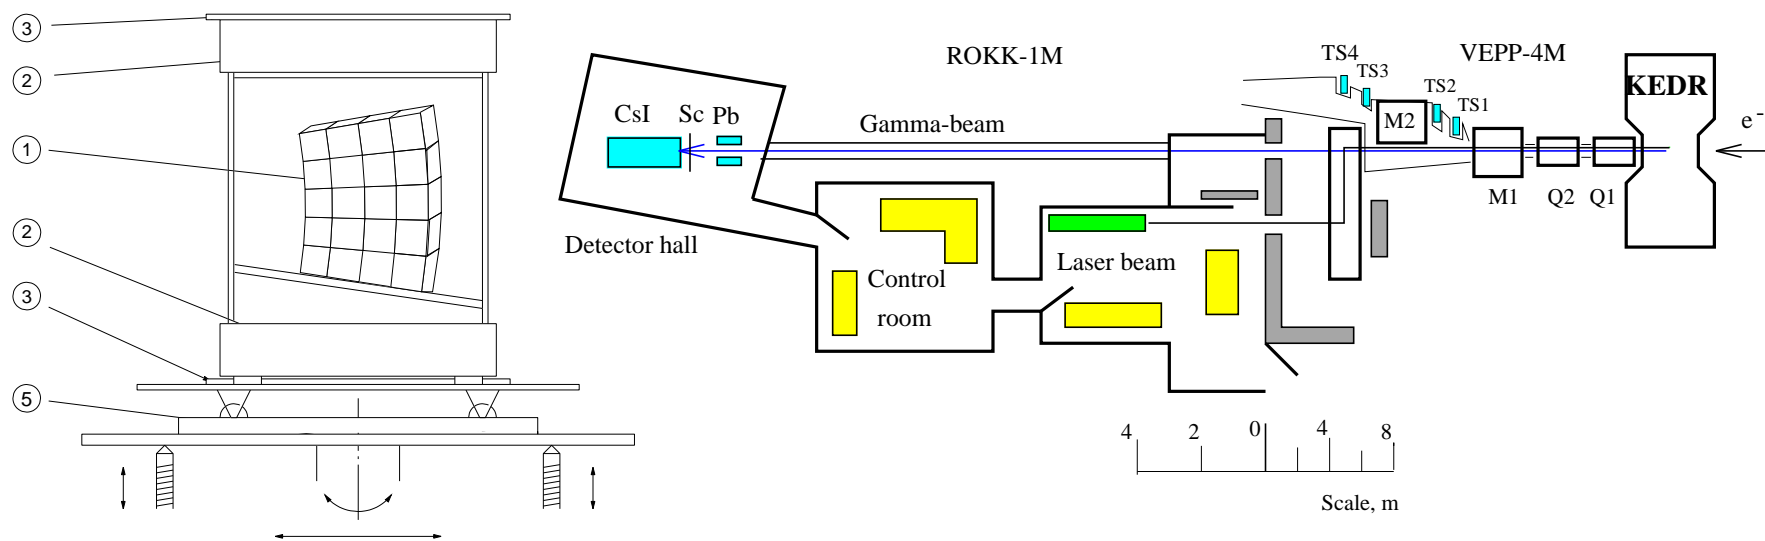

4 × 5 counters based on pure CsI crystals of endcap size (produced in Kharkov) coupled with PT

$$\omega_{max} = \frac{4(E_{beam}/m_e)^2 \omega_0}{(1 + 4E_{beam}\omega_0/m_e^2)}$$

$\omega_0 = 2.34 \text{ eV}; E_{beam} = 1.5 \sim 2.2 \text{ GeV};$

$$\omega_{max} = 70 \sim 160 \text{ MeV}$$

